| ENG / ALT OPTION | MASS (KG) WITH OIL | MASS (KG) OIL & WATER | DUAL WALL MASS (KG) WITH OIL | DUAL WALL MASS (KG) OIL & WATER | CENTER OF GRAVITY FROM O2 | DUAL WALL CENTER OF GRAVITY FROM O2 | STUB UP AREA POSITION FROM O2 (X) |
|---|---|---|---|---|---|---|---|
| 2806 / LL81140 | 5501 | 5569 | 5741 | 5809 | 2502 | 2500 | 4699.3 |
| 2806 / LL81146 | 5606 | 5674 | 5846 | 5914 | 2478 | 2477 | 4719.3 |
| 2806 / LL7024F | 5616 | 5684 | 5856 | 5924 | 2455 | 2455 | 4799.3 |
| 2806 / LL7024H | 5656 | 5724 | 5896 | 5964 | 2446 | 2446 | 4799.3 |
| 2806 / LL7024J | 5736 | 5824 | 5996 | 6084 | 2435 | 2436 | 4911.3 |
| 2806 / LL7024L | 5876 | 5944 | 6116 | 6184 | 2395 | 2397 | 4911.3 |

| TANK BASE | TANK CAPACITY (L) FILLABLE | USEABLE |
|---|---|---|
| STANDARD | 1157 | 1089 |
| DUAL WALL | 1143 | 1082 |

NOTE : DESIGN PRESSURE HEAD 3.7M



PICTORIAL VIEW




BREAKER STUB-UP LOCATION




NOTE: VIEWS SHOWS LL7024F ALTERNATOR, 1250A BREAKER (OPT) AND JACKET WATER (OPT)







CANOPY REMOVED FOR CLARITY

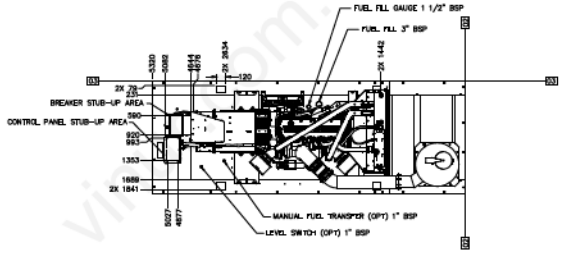


CANOPY – STANDARD 8HR TANKBASE
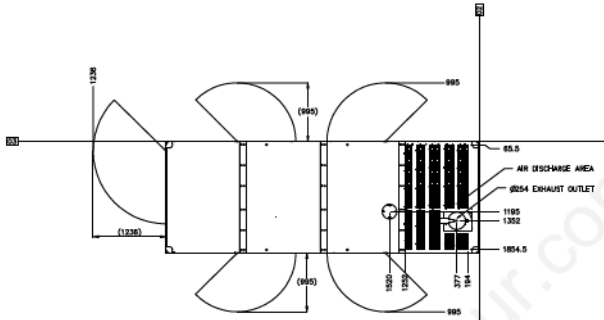
| | | |
|---|---|---|
| | 1E2722A | DRAWING |
| | 1E0013Y | CONFIDENTIALITY |
| | 1E0198R | LETTERS |
| | 1E0507B | IDENT |
| | 1E0011 | INTPR & TOL |

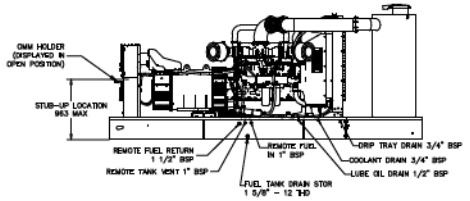UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. DIMENSIONS W/O TOL ARE BASIC

FORGEN TYPE: PRIMARY X, SECONDARY

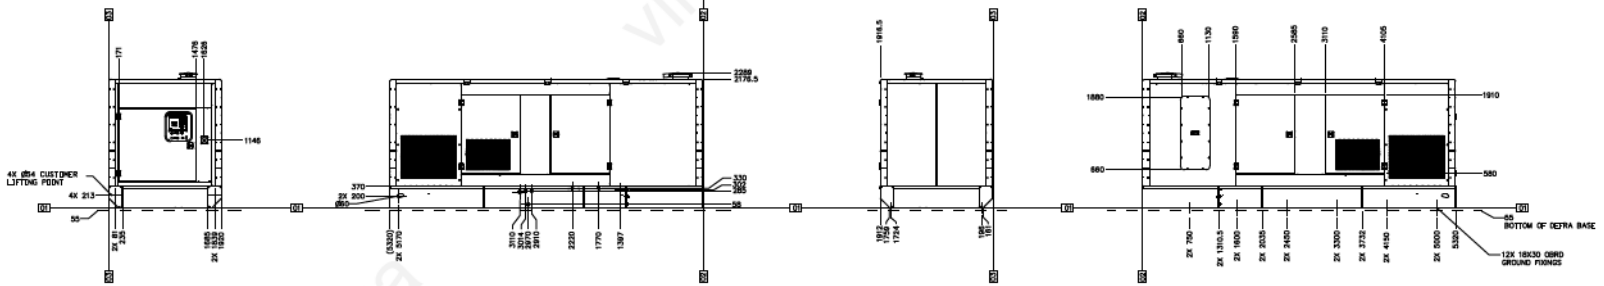THIRD ANGLE PROJECTION

SHEET 1 OF 1

DWG CONTROL MF759

GENERAL AR-COMPL (2806 SA W/ DEFRA)

393-0340 VER DKI 01 DWG E

vinur.com.ua